

New Product

Air Cooled Dry Pump

Kashiyama-USA

NeoDry Series Dry Vacuum Pumps



Simple to Use - No Water or N2 Required - Plug into AC and Start
 Clean Vacuum - No Tip Seal Dust like Dry Scroll Pumps
 Low Cost of Ownership (CoO) Among Comparable Pumps
 Maintenance Free - Non Contact Internal Components
 Applicable for Water Vapor Pumping

Air Cooled Dry Pump


Item	Model	NeoDry 15C	NeoDry 36C	Remarks
Max. Pumping Speed CF per min (liters Per Min)		9 (250)	21 (600)	
Ultimate Pressure (Pa (Torr))		1.0 (0.007)		
Max. Inlet Pressure (Pa)		ATM		
Connection Size	Inlet	NW25	NW40	
	Outlet	NW25		
Rated Motor Output (kW)		0.4	0.75	
Power Supply (50/60Hz)		- Single Phase: 100-115V - Single Phase: 200-240V - 3-Phase: 200-240V		
Gas Purge System		Available (N 2)		Optional
Max. Water Vapor Allowance		250g/h	350g/h	
Noise dB (A)		60	62	with Inlet Closed
Weight kg.(lbs)		23 (50)	58 (128)	
Others		The external structure is not completely leak tight.		

New Product


Air Cooled Dry Pump

Kashiyama-USA


NeoDry Series Dry Vacuum Pumps

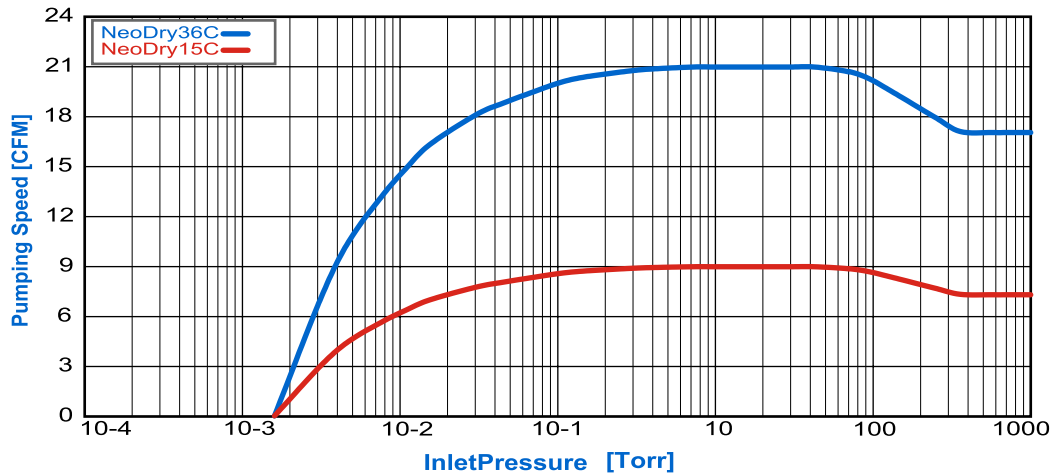

PumpSchematics(NeoDry15C)

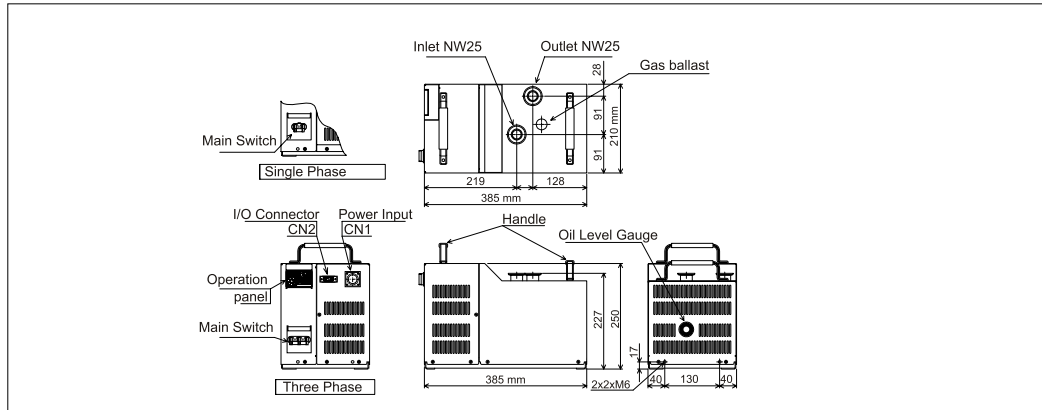

PumpSchematics(NeoDry36C)

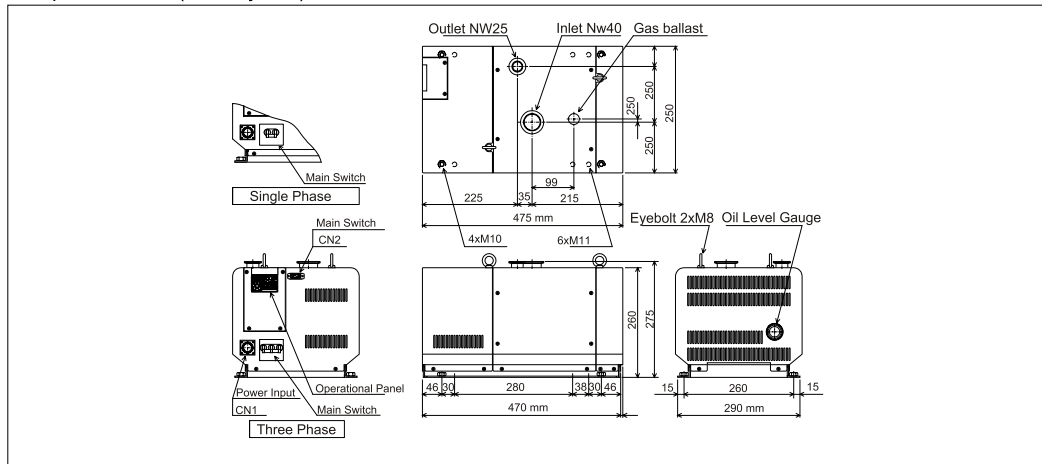

Air Cooled Dry Pump